





FLUID COMPONENTS, INC.

D1620 Series - M16 x 2.0

Test Point Plugs

Features


- Connects Under Full Pressure
- Rated at 9000 psi
- All Steel Construction
- Buna Seals are Standard

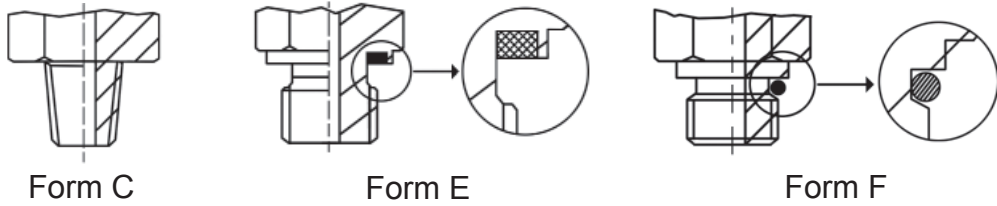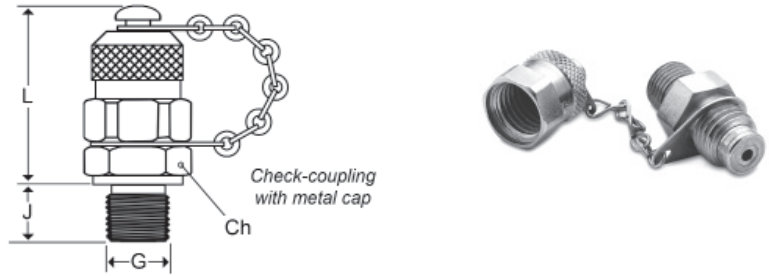

| Model # | Form | Max. Pressure | Ch. | J | G |
|------------------|------|---------------|------|------|-----------|
| D1620-01-18NPT | C | 5800 psi | .67" | .37" | 1/8" NPT |
| D1620-01-14NPT | C | 9000 psi | .67" | .55" | 1/4" NPT |
| D1620-01-04SAE | F | 9000 psi | .67" | .43" | 04-SAE |
| D1620-01-06SAE | F | 9000 psi | .75" | .47" | 06-SAE |
| D1620-01-08SAE | F | 9000 psi | .87" | .55" | 08-SAE |
| D1620-01-M10X1 | E | 9000 psi | .67" | .33" | M10X1 |
| D1620-01-M12x1.5 | E | 9000 psi | .67" | .47" | M12x1.5 |
| D1620-01-M14x1.5 | E | 9000 psi | .75" | .47" | M14x1.5 |
| D1620-01-M16x1.5 | E | 9000 psi | .87" | .47" | M16x1.5 |
| D1620-01-18BSPP | E | 9000 psi | .67" | .32" | 1/8" BSPP |
| D1620-01-14BSPP | E | 9000 psi | .75" | .47" | 1/4" BSPP |
| D1620-01-38BSPP | E | 9000 psi | .87" | .47" | 3/8" BSPP |

DGA1620 Series - M16 x 2.0

Test Point Probe

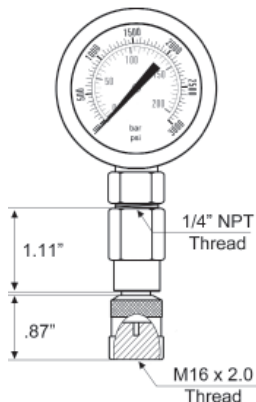

DGA1620 Test Point Probes are designed to connect directly to the D1620 Test Point Plugs (above). When fitted with the desired pressure gauge, the system pressure is released into the gauge's bourdon tube as the probe opens the test point valve. It can be connected and disconnected under pressure. This provides a precise means to monitor system pressure without turning the system off.

Order by Model #: DGA1620 Test Point Probe*

Gauge Protectors

Dynamic recommends the use of a gauge protector Buna N rubber housing when using a test point probe. This saves damage to the gauge should it be dropped or bumped during the test proceedings. Gauge Protectors can be ordered using model #: GP-40N. See page 15.

*Test Point Probe does not include gauge.